


CurrentMaster X Carts (4-wheel)



Specifications

Rating	UL 508 Listed, Type 3R Outdoor
Input Voltage	480V 3P4W Delta Standard, up to 600V available
Output Voltage	480V 3P4W Delta, 120/208V 4P5W Wye, and 125/250V 3P4W Single Ph Available
Amperage	30A - 200A Primary Side 100A - 400A Secondary Side (Additional amperages available in custom units)
Electrical	Square-D QO breakers (<250V); Siemens 3VA breakers (>250V) both with ALU interiors; Hammond Transformers with ALU windings
Materials	Frame: ASTM A36 Mild Steel, Powder Coated Enclosures: 16g painted galvanized steel
Size: 4-wheel cart	54h x 53w x 31d

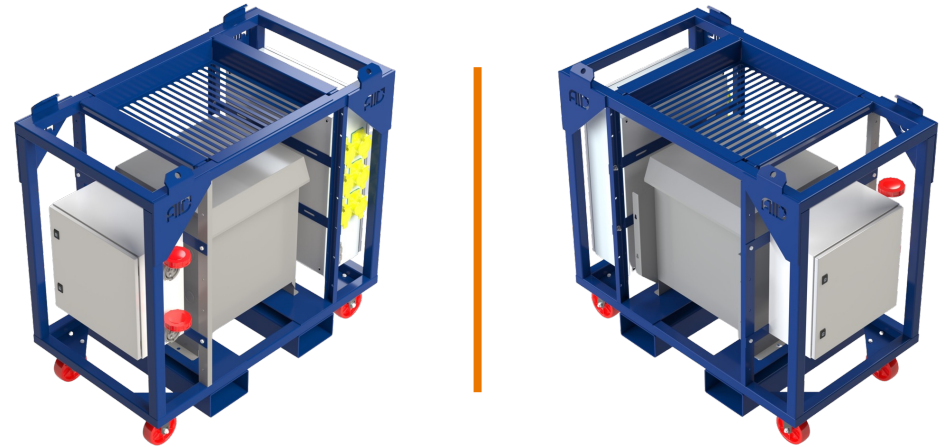

Standard PSX2F-U62E shown. Custom Voltages, Inputs/Outputs, Component Manufacturers, and sizes are available.

Product Selection

SKU#	Input Device	Transformer	Secondary Voltage	Sec. Amps	Sec. Main	Output #1 Type/Qty	Output #2 Type/Qty
PSX2F-E-D460	Direct	75kVA	120/208V 4P5W Wye	200	Y	6 x 50A 125/250V 3P4W CS6369	1x20A 125V 2P3W 5-20 GFCI Duplex
PSX2F-E-C460	Series 16 CAM	75kVA	120/208V 4P5W Wye	200	Y	6 x 50A 125/250V 3P4W CS6369	1x20A 125V 2P3W 5-20 GFCI Duplex
PSX2F-E-U460	4100PS2W	75kVA	120/208V 4P5W Wye	200	Y	6 x 50A 125/250V 3P4W CS6369	1x20A 125V 2P3W 5-20 GFCI Duplex
PSX2F-E-C510	Series 16 CAM	75kVA	120/208V 4P5W Wye	200	N	1 x 200A 120/208V 4P5W Series 16 CAM	-
PSX2F-U62E-C510 **	Series 16 CAM	75kVA	120/208V 4P5W Wye	200	N	1 x 200A 120/208V 4P5W Series 16 CAM	-

** Primary Output includes 2 x 460RS2W