


# CurrentMaster X Sleds (2-wheel)



## Specifications

Rating	UL 508 Listed, Type 3R Outdoor
Input Voltage	480V 3P4W Delta Standard, up to 600V available
Output Voltage	480V 3P4W Delta, 120/208V 4P5W Wye, and 125/250V 3P4W Single Ph Available
Amperage	30A - 200A Primary Side 100A - 400A Secondary Side (Additional amperages available in custom units)
Electrical	Square-D QO breakers (<250V); Siemens 3VA breakers (>250V); Both with ALU interiors; Hammond Transformers with ALU windings
Materials	Frame: ASTM A36 Mild Steel, Powder Coated Enclosures: 16g painted galvanized steel
Size: 2-wheel cart	61 h x 28w x 42d

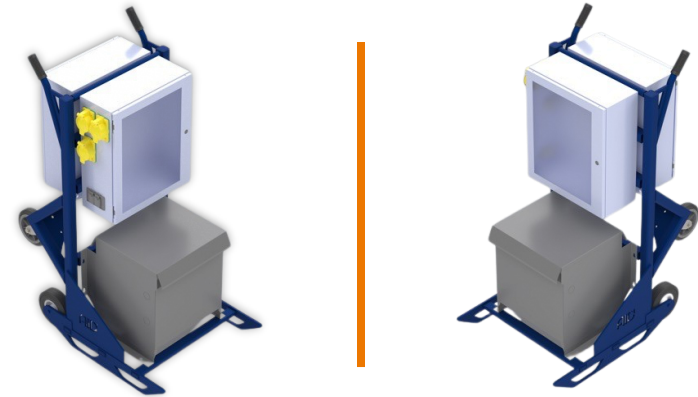

Standard PSX1F-U62E shown. Custom Voltages, Inputs/Outputs, Component Manufacturers, and sizes are available.

## Product Selection

SKU#	Input Device	Transformer	Secondary Voltage	Sec. Amps	Sec. Main	Output #1 Type/Qty	Output #2 Type/Qty
PSX1F-C-D2100	Direct	25kVA	125/250V 3P4W Single $\phi$	100	N	10 x 20A 125V 2P3W 5-20 Duplex	-
PSX1F-C-D2100G	Direct	25kVA	125/250V 3P4W Single $\phi$	100	N	10 x 20A 125V 2P3W 5-20 GFCI Duplex	-
PSX1F-C-D440	Direct	25kVA	125/250V 3P4W Single $\phi$	100	Y	4 x 50A 125/250V 3P4W CS6369	1 x 20A 125V 2P3W 5-20 GFCI Duplex
PSX1F-E-D2120	Direct	30kVA	120/208V 4P5W Wye	100	N	12 x 20A 125V 2P3W 5-20 Duplex	-
PSX1F-E-U2120	460PS2W	30kVA	120/208V 4P5W Wye	100	N	12 x 20A 125V 2P3W 5-20 Duplex	-
PSX1F-E-D2120G	Direct	30kVA	120/208V 4P5W Wye	100	N	12 x 20A 125V 2P3W 5-20 GFCI Duplex	-
PSX1F-E-C2120G	Series 16 CAM	30kVA	120/208V 4P5W Wye	100	N	12 x 20A 125V 2P3W 5-20 GFCI Duplex	-
PSX1F-E-U2120G	460PS2W	30kVA	120/208V 4P5W Wye	100	N	12 x 20A 125V 2P3W 5-20 GFCI Duplex	-
PSX1F-E-U212WG	460PS2W	30kVA	120/208V 4P5W Wye	100	N	15 x 20A 125V 2P3W 5-20 GFCI on 1 Ft Pigtails w/ WetGuard Devices	-

# CurrentMaster X Sleds (2-wheel)



## Product Selection

SKU#	Input Device	Transformer	Secondary Voltage	Sec. Amps	Sec. Main	Output #1 Type/Qty	Output #2 Type/Qty
PSX1F-E-D350	Direct	30kVA	120/208V 4P5W Wye	100	Y	5 x 20A 120/208V 4P5W L21-20	1 x 20A 125V 2P3W 5-20 GFCI Duplex
PSX1F-E-C350	Series 16 CAM	30kVA	120/208V 4P5W Wye	100	Y	5 x 20A 120/208V 4P5W L21-20	1 x 20A 125V 2P3W 5-20 GFCI Duplex
PSX1F-E-U350	460PS2W	30kVA	120/208V 4P5W Wye	100	Y	5 x 20A 120/208V 4P5W L21-20	1 x 20A 125V 2P3W 5-20 GFCI Duplex
PSX1F-E-D430	Direct	30kVA	120/208V 4P5W Wye	100	Y	3 x 50A 120/250V 3P4W CS6369	1 x 20A 125V 2P3W 5-20 GFCI Duplex
PSX1F-E-C430	Series 16 CAM	30kVA	120/208V 4P5W Wye	100	Y	3 x 50A 120/250V 3P4W CS6369	1 x 20A 125V 2P3W 5-20 GFCI Duplex
PSX1F-E-U430	460PS2W	30kVA	120/208V 4P5W Wye	100	Y	3 x 50A 120/250V 3P4W CS6369	1 x 20A 125V 2P3W 5-20 GFCI Duplex
PSX1F-E-C510	Series 16 CAM	30kVA	120/208V 4P5W Wye	100	N	1 x 100A 120/208V 4P5W Series 16 CAM	-
PSX1F-E-D351	Direct	45kVA	120/208V 4P5W Wye	125	Y	5 x 20A 120/208V 4P5W L21-20	1 x 20A 125V 2P3W 5-20 GFCI Duplex
PSX2F-E-C351	Series 16 CAM	45kVA	120/208V 4P5W Wye	125	Y	5 x 30A 120/208V 4P5W L21-30	1 x 20A 125V 2P3W 5-20 GFCI Duplex
PSX1F-E-U351	460PS2W	45kVA	120/208V 4P5W Wye	125	Y	5 x 30A 120/208V 4P5W L21-30	1 x 20A 125V 2P3W 5-20 GFCI Duplex
PSX1F-E-D440	Direct	45kVA	120/208V 4P5W Wye	125	Y	4 x 50A 125/250V 3P4W CS6369	1 x 20A 125V 2P3W 5-20 GFCI Duplex
PSX1F-E-C440	Series 16 CAM	45kVA	120/208V 4P5W Wye	125	Y	4 x 50A 125/250V 3P4W CS6369	1 x 20A 125V 2P3W 5-20 GFCI Duplex
PSX1F-U61E-U2120 *	4100PS2W	30kVA	120/208V 4P5W Wye	100	N	12 x 20A 125V 2P3W 5-20 Duplex	-
PSX1F-U61E-U2120G *	4100PS2W	30kVA	120/208V 4P5W Wye	100	N	12 x 20A 125V 2P3W 5-20 GFCI Duplex	-
PSX1F-U61E-U430 *	4100PS2W	30kVA	120/208V 4P5W Wye	100	Y	3 x 50A 125/250V 3P4W CS6369	1 x 20A 125V 2P3W 5-20 GFCI Duplex
PSX1F-U62E-D2120 **	Direct	30kVA	120/208V 4P5W Wye	100	N	12 x 20A 125V 2P3W 5-20 Duplex	-
PSX1F-U62E-D2120G **	Direct	30kVA	120/208V 4P5W Wye	100	N	12 x 20A 125V 2P3W 5-20 GFCI Duplex	-
PSX1F-U62E-U2120G **	4100PS2W	30kVA	120/208V 4P5W Wye	100	N	12 X 20A 125V 2P3W 5-20 GFCI Duplex	-
PSX1F-U62E-D430 **	Direct	30kVA	120/208V 4P5W Wye	100	Y	3 x 50A 125/250V 3P4W CS6369	1 x 20A 125V 2P3W 5-20 GFCI Duplex

\* Primary Output includes 1 x 460RS2W


\*\* Primary Output includes 2 x 460RS2W

# CurrentMaster X Carts (4-wheel)



## Specifications

Rating	UL 508 Listed, Type 3R Outdoor
Input Voltage	480V 3P4W Delta Standard, up to 600V available
Output Voltage	480V 3P4W Delta, 120/208V 4P5W Wye, and 125/250V 3P4W Single Ph Available
Amperage	30A - 200A Primary Side 100A - 400A Secondary Side (Additional amperages available in custom units)
Electrical	Square-D QO breakers (<250V); Siemens 3VA breakers (>250V) both with ALU interiors; Hammond Transformers with ALU windings
Materials	Frame: ASTM A36 Mild Steel, Powder Coated Enclosures: 16g painted galvanized steel
Size: 4-wheel cart	54h x 53w x 31d

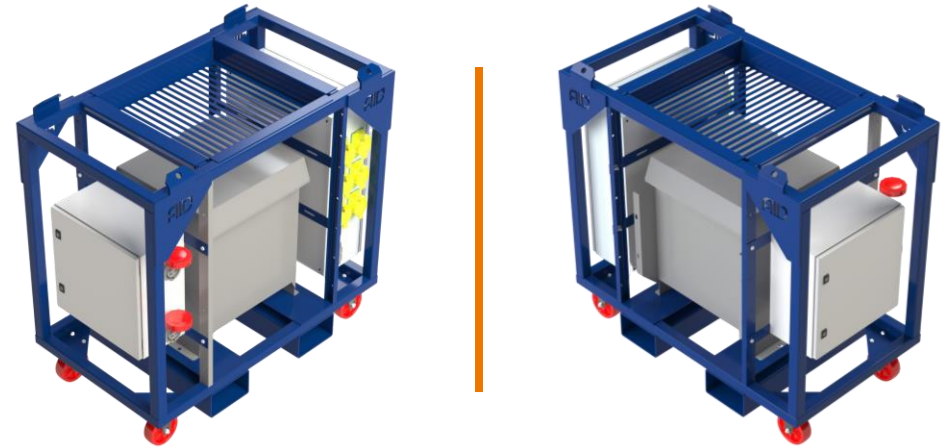

Standard PSX2F-U62E shown. Custom Voltages, Inputs/Outputs, Component Manufacturers, and sizes are available.

## Product Selection

SKU#	Input Device	Transformer	Secondary Voltage	Sec. Amps	Sec. Main	Output #1 Type/Qty	Output #2 Type/Qty
PSX2F-E-D460	Direct	75kVA	120/208V 4P5W Wye	200	Y	6 x 50A 125/250V 3P4W CS6369	1x20A 125V 2P3W 5-20 GFCI Duplex
PSX2F-E-C460	Series 16 CAM	75kVA	120/208V 4P5W Wye	200	Y	6 x 50A 125/250V 3P4W CS6369	1x20A 125V 2P3W 5-20 GFCI Duplex
PSX2F-E-U460	4100PS2W	75kVA	120/208V 4P5W Wye	200	Y	6 x 50A 125/250V 3P4W CS6369	1x20A 125V 2P3W 5-20 GFCI Duplex
PSX2F-E-C510	Series 16 CAM	75kVA	120/208V 4P5W Wye	200	N	1 x 200A 120/208V 4P5W Series 16 CAM	-
PSX2F-U62E-C510 **	Series 16 CAM	75kVA	120/208V 4P5W Wye	200	N	1 x 200A 120/208V 4P5W Series 16 CAM	-

\*\* Primary Output includes 2 x 460RS2W